

# 1. INTRODUCTION

MA Series green type capacitors are manufactured by using green materials without lead and cadmium. These capacitors feature series connection of multi-layer capacitor units in a MLCC to realize high voltage performance. Reliable performances are built-in through exact formulation of dielectric powders, preparation of conductive paste, advanced automatic manufacturing, and strict quality control to assure excellent control in dielectric thickness, electrode integrity, and electrode-to-termination continuity.

## 2. FEATURES

- a. High Voltage in a given case size.
- b. High reliability and stability.

## 3. APPLICATIONS


- a. DC to DC converter.
- b. High voltage coupling/DC blocking.
- c. Back-lighting inverters.
- d. Sunbbers in high frequency power convertors.

## 4. HOW TO ORDER

<u>MA</u>	<u>1210</u>	<u>XR</u>	-	<u>102</u>	<u>K</u>	-	<u>101</u>	<u>ER</u>	<u>G</u>
PDC Family	Size	Dielectric		Capacitance	Tolerance		Rated voltage	Packaging	Control Code
Inch (mm)		CG: C0G			B=±0.1pF				
<b>0402</b> (1005)		XR: X7R		Two significant digits followed by no. of zeros. And R is in place of decimal point.	C=±0.25pF				
<b>0603</b> (1608)		YV: Y5V			D=±0.5pF				
<b>0805</b> (2012)					F=±1%				
<b>1206</b> (3216)					G=±2%				
<b>1210</b> (3225)					J=±5%				
<b>1808</b> (4520)				eg.: R47=0.47pF	K=±10%				
<b>1812</b> (4532)				0R5=0.5pF	M=±20%				
<b>2220</b> (5750)				1R0=1.0pF	Z=-20/+80%				
<b>2225</b> (5763)				100=10x10 <sup>0</sup> =10pF			<b>101</b> =100 VDC		
							<b>201</b> = 200 VDC		
							<b>251</b> =250 VDC		
							<b>501</b> =500 VDC		
							<b>631</b> =630 VDC		
								PR: Tape and Reel, Paper Tape ER: Tape and Reel, Embossed Tape No Code: Bulk	
									G: RoHS compliant

## 5. EXTERNAL DIMENSIONS

Size Inch (mm)	L (mm)	W (mm)	Tmax (mm)	M <sub>B</sub> min (mm)
0402 (1005)	1.00±0.05	0.50±0.05	0.55	0.15
0603 (1608)	1.60±0.10	0.80±0.10	0.95	0.20
	1.60+0.15/-0.10	0.80±0.15		
0805 (2012)	2.00±0.20	1.25±0.20	1.45	0.30
1206 (3216)	3.20±0.20	1.60±0.20	1.80	0.30
1210 (3225)	3.20±0.40	2.50±0.30	2.80	0.30
1808 (4520)	4.50±0.40	2.00±0.20	1.80	0.26
1812 (4532)	4.50±0.40	3.20±0.30	2.80	0.26
1825 (4563)	4.60±0.30	6.30±0.40	3.00	0.26
2220 (5750)	5.70±0.40	5.00±0.40	3.00	0.30
2225 (5763)	5.70±0.40	6.30±0.40	3.00	0.30

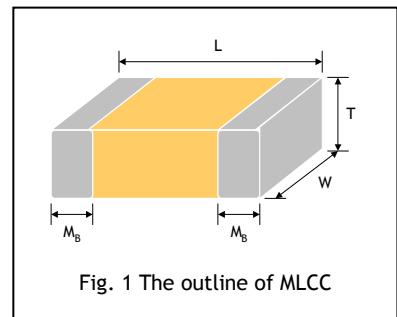

## 6. GENERAL ELECTRICAL DATA

Dielectric	NP0	X7R	Y5V
Size	0402, 0603, 0805, 1206, 1210, 1812	0603, 0805, 1206, 1210, 1808, 1812, 1825, 2220, 2225	0805, 1206, 1210, 1812
Capacitance range*	0.5pF to 33nF	100pF to 1.0μF	10nF to 1.0μF
Capacitance tolerance	Cap≤5pF: B (±0.1pF), C (±0.25pF) 5pF<Cap<10pF: C (±0.25pF), D (±0.5pF) Cap≥10pF: F (±1%), G (±2%), J (±5%), K (±10%)	J (±5%), K (±10%), M (±20%)	Z (-20/+80%)
Rated voltage (WVDC)	100V, 200V, 250V, 500V, 630V	100V, 200V, 250V, 500V, 630V	100V, 200V, 250V
Tan δ*	Cap<30pF: Q≥400+20C Cap≥30pF: Q≥1000	≤2.5%	≤5%
Insulation resistance at Ur**	≥100GΩ or R•C≥1000 whichever is smaller	≥10GΩ or R•C≥100Ω-F whichever is smaller	
Operating temperature	-55 to +125°C		-25 to +85°C
Capacitance characteristic	±30ppm / °C	±15%	+30/-80%
Termination	Cu (or Ag)/Ni/Sn (lead-free termination)		

\* Measured at the condition of 30~70% related humidity.

NP0: Apply 1.0±0.2Vrms, 1.0MHz±10% for Cap≤1000pF and 1.0±0.2Vrms, 1.0kHz±10% for Cap>1000pF, 25°C at ambient temperature

X7R: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 25°C ambient temperature.

Y5V: Apply 1.0±0.2Vrms, 1.0kHz±10%, at 20°C ambient temperature.

\*\*Measured at 500VDC for 60 sec, for U<sub>R</sub>>500VDC

## 7.CAPACITANCE RANGE

### 7-1. NP0 Dielectric

DIELECTRIC SIZE	NP0														
	0402				0603				0805				1206		
RATED VOLTAGE (VDC)	100	100	200	250	100	200	250	500	630	100	200	250	500	630	
0.5 pF (0R5)															
1.0 pF (1R0)															
1.2 pF (1R2)															
1.5 pF (1R5)															
3.9pF (3R9)															
4.7pF (4R7)															
5.6pF (5R6)															
6.8pF (6R8)															
8.2pF (8R2)															
10pF (100)															
12pF (120)															
15pF (150)															
18pF (180)															
22pF (220)															
27pF (270)															
33pF (330)															
39pF (390)															
47pF (470)															
56pF (560)															
68pF (680)															
82pF (820)															
100pF (101)															
120pF (121)															
150pF (151)															
180pF (181)															
220pF (221)															
270pF (271)															
330pF (331)															
390pF (391)															
470pF (471)															
560pF (561)															
680pF (681)															
820pF (821)															
1,000pF (102)															
1,200pF (122)															
1,500pF (152)															
1,800pF (182)															
2,200pF (222)															
2,700pF (272)															
3,300pF (332)															
3,900pF (392)															
4,700pF (472)															
5,600pF (562)															
6,800pF (682)															
8,200pF (822)															
0.010μF (103)															

DIELECTRIC		NP0									
SIZE		1210				1812					
RATED VOLTAGE (VDC)		100	200	250	500	630	100	200	250	500	630
Capacitance	1.0pF (1R0)										
	1.2pF (1R2)										
	1.5pF (1R5)										
	1.8pF (1R8)										
	2.2pF (2R2)										
	2.7pF (2R7)										
	3.3pF (3R3)										
	3.9pF (3R9)										
	4.7pF (4R7)										
	5.6pF (5R6)										
	6.8pF (6R8)										
	8.2pF (8R2)										
	10pF (100)										
	12pF (120)										
	15pF (150)										
	18pF (180)										
	22pF (220)										
	27pF (270)										
	33pF (330)										
	39pF (390)										
	47pF (470)										
	56pF (560)										
	68pF (680)										
	82pF (820)										
	100pF (101)										
	120pF (121)										
	150pF (151)										
	180pF (181)										
	220pF (221)										
	270pF (271)										
	330pF (331)										
	390pF (391)										
	470pF (471)										
	560pF (561)										
	680pF (681)										
	820pF (821)										
	1,000pF (102)										
	1,200pF (122)										
	1,500pF (152)										
	1,800pF (182)										
	2,200pF (222)										
	2,700pF (272)										
	3,300pF (332)										
	3,900pF (392)										
	4,700pF (472)										
	5,600pF (562)										
	6,800pF (682)										
	8,200pF (822)										
	0.010µF (103)										
	0.012µF (123)										
	0.015µF (153)										
	0.018µF (183)										
	0.022µF (223)										
	0.027µF (273)										
	0.033µF (333)										
	0.039µF (393)										

## 7.2 X7R Dielectric

DIELECTRIC		X7R															
Capacitance	SIZE	0603			0805				1206				1210				
		100	200	250	100	200	250	500	100	200	250	500	630	100	200	250	500
	100pF (101)																
	120pF (121)																
	150pF (151)																
	180pF (181)																
	220pF (221)																
	270pF (271)																
	330pF (331)																
	390pF (391)																
	470pF (471)																
	560pF (561)																
	680pF (681)																
	820pF (821)																
	1,000pF (102)																
	1,200pF (122)																
	1,500pF (152)																
	1,800pF (182)																
	2,200pF (222)																
	2,700pF (272)																
	3,300pF (332)																
	3,900pF (392)																
	4,700pF (472)																
	5,600pF (562)																
	6,800pF (682)																
	8,200pF (822)																
	0.010µF (103)																
	0.012µF (123)																
	0.015µF (153)																
	0.018µF (183)																
	0.022µF (223)																
	0.027µF (273)																
	0.033µF (333)																
	0.039µF (393)																
	0.047µF (473)																
	0.056µF (563)																
	0.068µF (683)																
	0.082µF (823)																
	0.10µF (104)																
	0.12µF (124)																
	0.15µF (154)																
	0.18µF (184)																
	0.22µF (224)																
	0.27µF (274)																
	0.33µF (334)																
	0.39µF (394)																
	0.47µF (474)																
	0.56µF (564)																
	0.68µF (684)																
	0.82µF (824)																
	1.0µF (105)																

DIELECTRIC		X7R													
SIZE		1808				1812				1825					
RATED		100	200	250	500	100	200	250	500	630	100	200	250	500	630
Capacitance	100pF (101)														
	120pF (121)														
	150pF (151)														
	180pF (181)														
	220pF (221)														
	270pF (271)														
	330pF (331)														
	390pF (391)														
	470pF (471)														
	560pF (561)														
	680pF (681)														
	820pF (821)														
	1,000pF (102)														
	1,200pF (122)														
	1,500pF (152)														
	1,800pF (182)														
	2,200pF (222)														
	2,700pF (272)														
	3,300pF (332)														
	3,900pF (392)														
	4,700pF (472)														
	5,600pF (562)														
	6,800pF (682)														
	8,200pF (822)														
	0.010µF (103)														
	0.012µF (123)														
	0.015µF (153)														
	0.018µF (183)														
	0.022µF (223)														
	0.027µF (273)														
	0.033µF (333)														
	0.039µF (393)														
	0.047µF (473)														
	0.056µF (563)														
	0.068µF (683)														
	0.082µF (823)														
	0.10µF (104)														
	0.12µF (124)														
	0.15µF (154)														
	0.18µF (184)														
	0.22µF (224)														
	0.27µF (274)														
	0.33µF (334)														
	0.39µF (394)														
	0.47µF (474)														
	0.56µF (564)														
	0.68µF (684)														
	0.82µF (824)														
	1.0µF (105)														

DIELECTRIC		X7R								
Capacitance	SIZE	2220				2225				
		100	200	250	500	630	100	200	250	500
	100pF (101)									
	120pF (121)									
	150pF (151)									
	180pF (181)									
	220pF (221)									
	270pF (271)									
	330pF (331)									
	390pF (391)									
	470pF (471)									
	560pF (561)									
	680pF (681)									
	820pF (821)									
	1,000pF (102)									
	1,200pF (122)									
	1,500pF (152)									
	1,800pF (182)									
	2,200pF (222)									
	2,700pF (272)									
	3,300pF (332)									
	3,900pF (392)									
	4,700pF (472)									
	5,600pF (562)									
	6,800pF (682)									
	8,200pF (822)									
	0.010µF (103)									
	0.012µF (123)									
	0.015µF (153)									
	0.018µF (183)									
	0.022µF (223)									
	0.027µF (273)									
	0.033µF (333)									
	0.039µF (393)									
	0.047µF (473)									
	0.056µF (563)									
	0.068µF (683)									
	0.082µF (823)									
	0.10µF (104)									
	0.12µF (124)									
	0.15µF (154)									
	0.18µF (184)									
	0.22µF (224)									
	0.27µF (274)									
	0.33µF (334)									
	0.39µF (394)									
	0.47µF (474)									
	0.56µF (564)									
	0.68µF (684)									
	0.82µF (824)									
	1.0µF (105)									

### 7-3. Y5V Dielectric

DIELECTRIC SIZE		Y5V											
RATED VOLTAGE(VDC)		0805			1206			1210			1812		
		100	200	250	100	200	250	100	200	250	100	200	250
Capacitance	0.010μF (103)												
	0.015μF (153)												
	0.022μF (223)												
	0.033μF (333)												
	0.047μF (473)												
	0.068μF (683)												
	0.10μF (104)												
	0.15μF (154)												
	0.18μF (184)												
	0.22μF (224)												
	0.33μF (334)												
	0.47μF (474)												
	0.68μF (684)												
	1.0μF (105)												

## 8.PACKAGE DIMENSION AND QUANTITY

Size	Thickness (mm)	Paper tape		Plastic tape	
		7" reel	13" reel	7" reel	13" reel
0402 (1005)	0.50±0.05	10k	50K	-	-
0603 (1608)	0.80±0.07	4k	15k	-	-
	0.80+0.15/-0.10	4k	15k	-	-
0805 (2012)	0.60±0.10	4k	15k	-	-
	0.80±0.10	4k	15k	-	-
	1.25±0.10	-	-	3k	10k
	1.25±0.20	-	-	3k	-
1206 (3216)	0.80±0.10	4k	15k	-	-
	0.95±0.10	-	-	3k	10k
	1.25±0.10	-	-	3k	10k
	1.60±0.20	-	-	2k	-
1210 (3225)	0.95±0.10	-	-	3k	10k
	1.25±0.10	-	-	3k	10k
	1.60±0.20	-	-	2k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	1k	-
1808 (4520)	1.60±0.20	-	-	2k	-
1812 (4532)	1.25±0.10	-	-	1k	-
	1.60±0.20	-	-	1k	-
	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	3k
	1.60±0.20	-	-	1k	-
1825 (4563)	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	1.60±0.20	-	-	1k	-
2220 (5750)	2.00±0.20	-	-	1k	-
	2.50±0.30	-	-	0.5k	-
	2.00±0.20	-	-	1k	-
2225 (5763)	2.50±0.30	-	-	0.5k	-

Unit: pieces


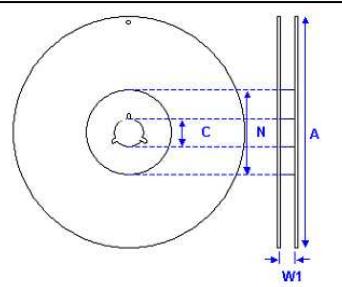



Fig. 4 The dimension of reel

Size	0402, 0603, 0805, 1206, 1210			1808,1812,1825, 2220 ,2225
Reel size	7"	10"	13"	7"
C	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2	13.0+0.5/-0.2
W <sub>1</sub>	8.4+1.5/-0	8.4+1.5/-0	8.4+1.5/-0	12.4+2.0/-0
A	178.0±0.10	250.0±1.0	330.0±1.0	178.0±0.10
N	60.0±1.0/-0	100.0±1.0	100±1.0	80.0±1.0

## 8-1. CARDBOARD TAPE DIMENSIONS

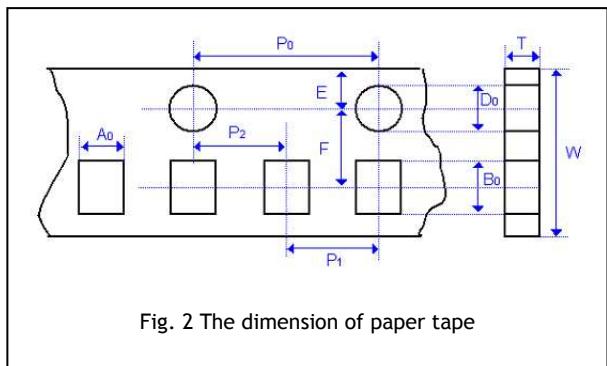

## 8-2. EMBOSSED TAPE DIMENSIONS

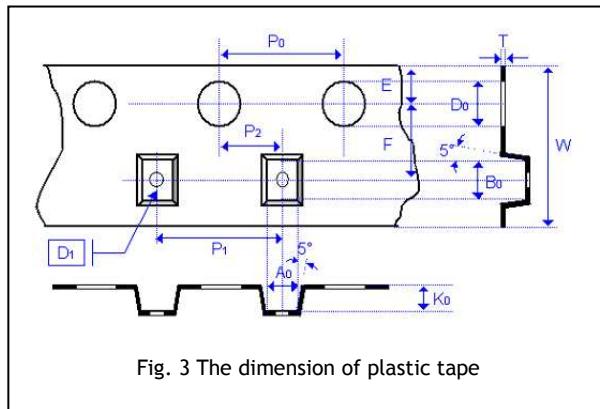

Size	0402	0603		0805		1206			1210	
Chip Thickness	$0.50 \pm 0.05$	$0.80 \pm 0.07$	$0.80 + 0.15 / -0.10$	$0.80 \pm 0.10$	$1.25 \pm 0.10$ $1.25 \pm 0.20$	$0.80 \pm 0.10$	$0.95 \pm 0.10$ $1.25 \pm 0.10$	$1.60 \pm 0.20$	$0.95 \pm 0.10$ $1.25 \pm 0.10$	$1.60 \pm 0.20$ $2.00 \pm 0.20$ $2.50 \pm 0.30$
A <sub>0</sub>	$0.62 \pm 0.05$	$1.00 + 0.05 / -0.10$	$1.02 + 0.05 / -0.10$	$1.50 \pm 0.10$	<1.65	$2.00 \pm 0.10$	<2.00	<2.00	<3.05	<3.10
B <sub>0</sub>	$1.12 \pm 0.05$	$1.80 \pm 0.10$	$1.80 \pm 0.10$	$2.30 \pm 0.10$	<2.40	$3.50 \pm 0.10$	<3.60	<3.70	<3.80	<4.00
T	$0.60 \pm 0.05$	$0.95 \pm 0.05$	$0.97 \pm 0.05$	$0.95 \pm 0.05$	$0.23 \pm 0.05$	$0.95 \pm 0.05$	$0.23 \pm 0.05$	$0.23 \pm 0.05$	$0.23 \pm 0.05$	$0.23 \pm 0.05$
K <sub>0</sub>	-	-	-	-	<2.50	-	<2.50	<2.50	<2.50	<3.50
W	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$
P <sub>0</sub>	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$
$10 \times P_0$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$
P <sub>1</sub>	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$
P <sub>2</sub>	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$
D <sub>0</sub>	$1.55 \pm 0.05$	$1.55 \pm 0.05$	$1.55 \pm 0.05$	$1.55 \pm 0.05$	$1.50 \pm 0.10 / -0$	$1.55 \pm 0.05$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$
D <sub>1</sub>	-	-	-	-	$1.00 \pm 0.10$	-	$1.00 \pm 0.10$	$1.00 \pm 0.10$	$1.00 \pm 0.10$	$1.00 \pm 0.10$
E	$1.75 \pm 0.05$	$1.75 \pm 0.05$	$1.75 \pm 0.05$	$1.75 \pm 0.05$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$
F	$3.50 \pm 0.05$	$3.50 \pm 0.05$	$3.50 \pm 0.05$	$3.50 \pm 0.05$	$3.50 \pm 0.05$	$3.50 \pm 0.05$	$3.50 \pm 0.05$	$3.50 \pm 0.05$	$3.50 \pm 0.05$	$3.50 \pm 0.05$

Size	1808		1812		1825		2220		2225	
Chip Thickness	$1.25 \pm 0.10$ $1.60 \pm 0.20$	$2.00 \pm 0.20$	$1.25 \pm 0.10$ $1.60 \pm 0.20$ $2.00 \pm 0.20$	$2.50 \pm 0.30$	$1.60 \pm 0.20$ $2.00 \pm 0.20$	$2.50 \pm 0.30$	$1.40 \pm 0.15$ $1.60 \pm 0.20$ $2.00 \pm 0.20$	$2.50 \pm 0.30$	$2.00 \pm 0.20$	$2.50 \pm 0.30$
A <sub>0</sub>	<2.50	<2.50	<3.90	<3.90	<6.80	<6.80	<5.80	<5.80	<6.80	<6.80
B <sub>0</sub>	<5.30	<5.30	<5.30	<5.30	<5.30	<5.30	<6.50	<6.50	<6.50	<6.50
T	$0.25 \pm 0.05$	$0.25 \pm 0.05$	$0.25 \pm 0.05$	$0.25 \pm 0.05$	$0.30 \pm 0.10$	$0.30 \pm 0.10$	$0.30 \pm 0.10$	$0.30 \pm 0.10$	$0.30 \pm 0.10$	$0.30 \pm 0.10$
K <sub>0</sub>	<2.50	<2.50	<2.50	<3.00	<2.50	<3.10	<2.50	<3.10	<2.50	<3.10
W	$12.0 \pm 0.20$	$12.0 \pm 0.20$	$12.0 \pm 0.20$	$12.0 \pm 0.20$	$12.0 \pm 0.20$	$12.0 \pm 0.20$	$12.0 \pm 0.20$	$12.0 \pm 0.20$	$12.0 \pm 0.20$	$12.0 \pm 0.20$
P <sub>0</sub>	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$4.00 \pm 0.10$
$10 \times P_0$	$40.0 \pm 0.20$	$40.0 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$	$40.00 \pm 0.20$
P <sub>1</sub>	$4.00 \pm 0.10$	$4.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$	$8.00 \pm 0.10$
P <sub>2</sub>	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$	$2.00 \pm 0.05$
D <sub>0</sub>	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$	$1.50 \pm 0.10 / -0$
D <sub>1</sub>	$1.50 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.10$	$1.50 \pm 0.10$
E	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$	$1.75 \pm 0.10$
F	$5.50 \pm 0.05$	$5.50 \pm 0.05$	$5.50 \pm 0.05$	$5.50 \pm 0.05$	$5.50 \pm 0.05$	$5.50 \pm 0.05$	$5.50 \pm 0.05$	$5.50 \pm 0.05$	$5.50 \pm 0.05$	$5.50 \pm 0.05$

## **9.APPLICATION NOTES**

### **STORAGE**

To prevent the damage of solderability of terminations, the following storage conditions are recommended:

Indoors under 5 ~ 40°C and 20% ~ 70% RH.

No harmful gases containing sulfuric acid, ammonia, hydrogen sulfide or chlorine.

Packaging should not be opened until the capacitors are required for use. If opened, the pack should be re-sealed as soon as is practicable. Taped product should be stored out of direct sunlight, which might promote deterioration in tape or adhesion performance. The capacitors should be used within 6 months and checked the solderability before use.

### **HANDLING**

Chip capacitors are dense, hard, brittle, and abrasive materials. They are liable to suffer mechanical damage, in the form of cracks or chips. Chip Capacitors should be handled with care to avoid contamination or damage. To use vacuum or plastic tweezers to pick up or plastic tweezers is recommended for manual placement. Tape and reeled packages are suitable for automatic pick and placement machine.

### **PREHEAT**

In order to minimize the risk of thermal shock during soldering, a carefully controlled preheat is required. The rate of preheat should not exceed 4°C per second and the final preheat temperature should be within 100°C of the soldering temperature for small chips such as 0402, 0603, 0805 and 1206, within 50°C of the soldering temperature for bigger chips such as 1210, 1808, 1812, 1825, 2220 and 2225, etc.


### **SOLDERING**

Use mildly activated rosin RA and RMA fluxes do not use activated flux. The amount of solder in each solder joint should be controlled to prevent the damage of chip capacitors caused by the stress between solder, chips, and substrate.

Hand soldering with temperature-controlled iron not exceeding 30 watts and diameter of tip less than 1.2 mm is recommended, tip of iron should not contact the ceramic body directly, and the temperature of iron should be set to not more than 260°C.

For bigger chips such as 1210, 1808, 1812, 2220 and 2225, etc. wave soldering and hand soldering are no recommended.

Recommended soldering profiles as following:

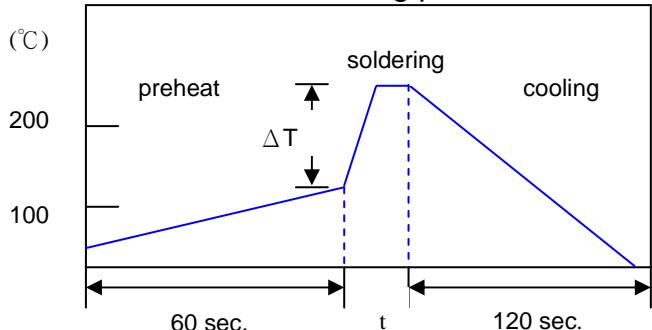

Soldering	Solder Temp.(T)	Soldering Time (t)
Reflow	235 – 260 °C	< 15 sec.
Wave	230 – 260 °C	< 5 sec.

Chip Size	ΔT
0402, 0603, 0805, 1206	100 °C
1210, 1808, 1812, 1825, 2220, 2225	50 °C

### **COOLING**

After soldering, cool the chips and the substrate gradually to room temperature. Natural cooling in air is recommended to minimize stress in the solder joint. A cooling rate not exceeding 4°C per second should be used when forced cooling is necessary.

### **CLEANING**

All flux residues must be removed by using suitable electronic-grade vapor-cleaning solvents to eliminate contamination that could cause electrolytic surface corrosion. Good results can be obtained by using ultrasonic cleaning of the solvent. The choice of the proper system is depends upon many factors such as component mix, flux, and solder paste and assembly method. The ability of the cleaning system to remove flux residues and contamination from under the chips is very important.

## 10.RELIABILITY TEST CONDITIONS AND REQUIREMENTS

No.	Item	Test Condition	Requirements																
1.	<b>Visual and Mechanical</b>	---	<ul style="list-style-type: none"> <li>* No remarkable defect.</li> <li>* Dimensions to conform to individual specification sheet.</li> </ul>																
2.	<b>Capacitance</b>	Class I: (NP0)	<ul style="list-style-type: none"> <li>* Shall not exceed the limits given in the detailed spec.</li> </ul>																
3.	<b>Q/D.F. (Dissipation Factor)</b>	Cap $\leq$ 1000pF, 1.0 $\pm$ 0.2Vrms, 1MHz $\pm$ 10% Cap $>$ 1000pF, 1.0 $\pm$ 0.2Vrms, 1KHz $\pm$ 10% Class II: (X7R, Y5V) 1.0 $\pm$ 0.2Vrms, 1kHz $\pm$ 10%	NP0: Cap $\geq$ 30pF, Q $\geq$ 1000; Cap $<$ 30pF, Q $\geq$ 400+20C X7R: $\leq$ 2.5% Y5V: $\leq$ 5.0%																
4.	<b>Temperature Coefficient</b>	With no electrical load. <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <th>T.C.</th> <th>Operating Temp</th> </tr> <tr> <td>NP0</td> <td>-55-125°C at 25°C</td> </tr> <tr> <td>X7R</td> <td>-55-125°C at 25°C</td> </tr> <tr> <td>Y5V</td> <td>-25-85°C at 20°C</td> </tr> </table>	T.C.	Operating Temp	NP0	-55-125°C at 25°C	X7R	-55-125°C at 25°C	Y5V	-25-85°C at 20°C	<table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <th>T.C.</th> <th>Capacitance Change</th> </tr> <tr> <td>NP0</td> <td>Within <math>\pm</math>30ppm/°C</td> </tr> <tr> <td>X7R</td> <td>Within <math>\pm</math>15%</td> </tr> <tr> <td>Y5V</td> <td>Within +30%/-80%</td> </tr> </table>	T.C.	Capacitance Change	NP0	Within $\pm$ 30ppm/°C	X7R	Within $\pm$ 15%	Y5V	Within +30%/-80%
T.C.	Operating Temp																		
NP0	-55-125°C at 25°C																		
X7R	-55-125°C at 25°C																		
Y5V	-25-85°C at 20°C																		
T.C.	Capacitance Change																		
NP0	Within $\pm$ 30ppm/°C																		
X7R	Within $\pm$ 15%																		
Y5V	Within +30%/-80%																		
5.	<b>Insulation Resistance</b>	U <sub>R</sub> =100V: To apply voltage at U <sub>R</sub> for max. 120 sec. U <sub>R</sub> >100V: To apply voltage at U <sub>R</sub> (500V max.) for 60 sec.	Class I (NP0) : $\geq$ 100GΩ or Rx <sub>C</sub> $\geq$ 1000Ω·F whichever is smaller. Class II (X7R, Y5V) : $\geq$ 10GΩ or Rx <sub>C</sub> $\geq$ 100Ω·F whichever is smaller.																
6.	<b>Dielectric Strength</b>	<ul style="list-style-type: none"> <li>* To apply voltage:            100V = 2.5 times of U<sub>R</sub>            200V/250V = 2 times of U<sub>R</sub>            500V/630V = 1.5 times of U<sub>R</sub> </li> <li>* Duration: 1 to 5 sec.</li> </ul>	* No evidence of damage or flashover during test.																
7.	<b>Solderability</b>	<ul style="list-style-type: none"> <li>* Solder temperature: 235<math>\pm</math>5°C</li> <li>* Dipping time: 2<math>\pm</math>0.5 sec.</li> </ul>	75% min. coverage of all metallized area.																
8.	<b>Resistance to Soldering Heat</b>	<ul style="list-style-type: none"> <li>* Solder temperature: 260<math>\pm</math>5°C</li> <li>* Dipping time: 10<math>\pm</math>1 sec</li> <li>* Preheating: 120 to 150°C for 1 minute before immerse the capacitor in a eutectic solder.</li> <li>* Before initial measurement (Class II only): Perform 150<math>\pm</math>0/-10°C for 1 hr and then set for 48<math>\pm</math>4 hrs at room temp.</li> <li>* Measurement to be made after keeping at room temp. for 24<math>\pm</math>2 hrs (Class I) or 48<math>\pm</math>4 hrs (Class II).</li> </ul>	<ul style="list-style-type: none"> <li>* No remarkable damage.</li> <li>* Cap change:            NP0: within <math>\pm</math>2.5% or <math>\pm</math>0.25pF whichever is larger.            X7R: within <math>\pm</math>7.5%            Y5V: within <math>\pm</math>20%            * 25% max. leaching on each edge.         </li> </ul>																
9.	<b>Temperature Cycle</b>	<ul style="list-style-type: none"> <li>* Conduct the five cycles according to the temperatures and time.</li> </ul> <table border="1" style="margin-left: auto; margin-right: auto;"> <tr> <th>Step</th> <th>Temp. (°C)</th> <th>Time (min.)</th> </tr> <tr> <td>1</td> <td>Min. operating temp. +0/-3</td> <td>30<math>\pm</math>3</td> </tr> <tr> <td>2</td> <td>Room temp.</td> <td>2~3</td> </tr> <tr> <td>3</td> <td>Max. operating temp. +3/-0</td> <td>30<math>\pm</math>3</td> </tr> <tr> <td>4</td> <td>Room temp.</td> <td>2~3</td> </tr> </table> <ul style="list-style-type: none"> <li>* Before initial measurement (Class II only): Perform 150<math>\pm</math>0/-10°C for 1 hr and then set for 48<math>\pm</math>4 hrs at room temp.</li> <li>* Measurement to be made after keeping at room temp. for 24<math>\pm</math>2 hrs (Class I) or 48<math>\pm</math>4 hrs (Class II).</li> </ul>	Step	Temp. (°C)	Time (min.)	1	Min. operating temp. +0/-3	30 $\pm$ 3	2	Room temp.	2~3	3	Max. operating temp. +3/-0	30 $\pm$ 3	4	Room temp.	2~3	<ul style="list-style-type: none"> <li>* No remarkable damage.</li> <li>* Cap change :            NP0: within <math>\pm</math>2.5% or <math>\pm</math>0.25pF whichever is larger.            X7R: within <math>\pm</math>15%            Y5V: within <math>\pm</math>20%         </li> <li>* Q/D.F.:            NP0: <math>\leq</math>2.0 <math>\times</math> Initial requirement            X7R: <math>\leq</math>1.5 <math>\times</math> Initial requirement            Y5V: <math>\leq</math>1.5 <math>\times</math> Initial requirement            * I.R.<math>\geq</math> 0.25 <math>\times</math> initial requirements.         </li> </ul>	
Step	Temp. (°C)	Time (min.)																	
1	Min. operating temp. +0/-3	30 $\pm$ 3																	
2	Room temp.	2~3																	
3	Max. operating temp. +3/-0	30 $\pm$ 3																	
4	Room temp.	2~3																	
10.	<b>Humidity (Damp Heat) Steady State</b>	<ul style="list-style-type: none"> <li>* Test temp.: 40<math>\pm</math>2°C</li> <li>* Humidity: 90~95% RH</li> <li>* Test time: 500+24/-0hrs.</li> <li>* Measurement to be made after keeping at room temp. for 24<math>\pm</math>2 hrs (Class I) or 48<math>\pm</math>4 hrs (Class II).</li> </ul>	<ul style="list-style-type: none"> <li>* No remarkable damage.</li> <li>* Cap change:            NP0 : within <math>\pm</math>5% or <math>\pm</math>2pF whichever is larger            X7R : within <math>\pm</math>15%            Y5V : within <math>\pm</math>30%         </li> <li>* Q/D.F Value:            NP0: Cap<math>\geq</math>30pF :Q<math>\geq</math>350;            10pF<math>\leq</math>Cap<math>&lt;</math>30pF :Q<math>\geq</math>275+2.5C;            Cap<math>&lt;</math>10pF :Q<math>\geq</math>200+10C            X7R: <math>\leq</math>7.0%            Y5V: <math>\leq</math>7.5%         </li> <li>* I.R.: <math>\geq</math>1GΩ or Rx<sub>C</sub><math>\geq</math>50Ω·F whichever is smaller.</li> </ul>																

## 10.RELIABILITY TEST CONDITIONS AND REQUIREMENTS (Cont.)

No.	Item	Test Condition	Requirements												
11.	<b>High Temperature Load (Endurance)</b>	<p>* Test temp.: NP0, X7R: <math>125\pm3^\circ\text{C}</math> Y5V: <math>85\pm3^\circ\text{C}</math></p> <p>* To apply voltage: (1) <math>U_R \leq 250\text{V}</math>: 200% of rated voltage. Exception item:</p> <table border="1" style="margin-left: auto; margin-right: auto;"> <thead> <tr> <th><math>U_R</math></th><th>Size</th><th>Cap</th><th>Voltage</th></tr> </thead> <tbody> <tr> <td>200V and</td><td>1210</td><td>&gt; 224</td><td>1.5 times</td></tr> <tr> <td>250V</td><td>1812</td><td>&gt; 474</td><td>of <math>U_R</math></td></tr> </tbody> </table> <p>(2) <math>250 &lt; U_R \leq 500\text{V}</math>: 150% of rated voltage. (3) <math>U_R &gt; 500\text{V}</math>: 120% of rated voltage.</p> <p>* Test time: <math>1000+24/-0</math> hrs.</p> <p>* Measurement to be made after keeping at room temp. for <math>24\pm2</math> hrs (Class I) or <math>48\pm4</math> hrs (Class II).</p>	$U_R$	Size	Cap	Voltage	200V and	1210	> 224	1.5 times	250V	1812	> 474	of $U_R$	<p>* No remarkable damage.</p> <p>* Cap change: NP0 : within <math>\pm 5\%</math> or <math>\pm 2\text{pF}</math> whichever is larger X7R : within <math>\pm 15\%</math> Y5V : within <math>\pm 30\%</math></p> <p>* Q/D.F Value: NP0: <math>\text{Cap} \geq 30\text{pF} : Q \geq 350</math>; <math>10\text{pF} \leq \text{Cap} &lt; 30\text{pF} : Q \geq 275 + 2.5C</math>; <math>\text{Cap} &lt; 10\text{pF} : Q \geq 200 + 10C</math></p> <p>X7R: <math>\leq 7.0\%</math> Y5V: <math>\leq 7.5\%</math></p> <p>* I.R.: <math>\geq 1\text{G}\Omega</math> or <math>RxC \geq 50\Omega\cdot\text{F}</math> whichever is smaller.</p>
$U_R$	Size	Cap	Voltage												
200V and	1210	> 224	1.5 times												
250V	1812	> 474	of $U_R$												
12.	<b>Resistance to Flexure of Substrate</b>	<p>* The middle part of substrate shall be pressurized by means of the pressurizing rod at a rate of about 1mm per second until the deflection becomes 1mm.</p>	<p>* No remarkable damage.</p> <p>* Cap change: NP0: within <math>\pm 10\%</math> X7R: within <math>\pm 12.5\%</math> Y5V: within <math>\pm 30\%</math></p> <p>(This capacitance change means the change of capacitance under specified flexure of substrate from the capacitance measured before the test.)</p>												
13.	<b>Adhesive Strength of Termination</b>	<p>* Capacitors mounted on a substrate. A force of 5N applied perpendicular to the place of substrate and parallel the line joining the center of terminations for <math>10\pm 1</math> second.</p>	<p>* No remarkable damage or removal of the terminations.</p>												